

THERMAL TAP

The World's best under bench instant boiling water unit

W
H
E
L
A
N


Australian
Designed
and
Manufactured



Whelan - the company you can trust

HOW TO SPECIFY WHELAN THERMAL TAP

1. To have solid state temperature control.
2. To be supplied with a 350 Kpa pressure limiting valve.
3. To be supplied with 1/4 turn solid brass tap.
4. To have in-built anti-flood tap, designed to prevent damage to bench top due to flooding.
5. Designed to contain water within 1°C of boiling point at all times when in operation.
6. To be installed in accordance with the Manufacturers instructions.

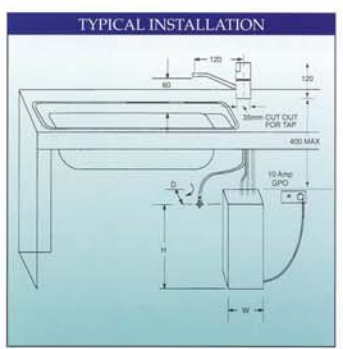

SELECTION CHART

To select the correct size unit for your needs. Simply determine how many cups of boiling water are required at any one time, then choose the corresponding model from the chart below.

MODEL NO.	No. OF CUPS SERVED	TOTAL KW	CUP /h. RECOVERY	PHASE/ VOLTAGE	HEIGHT mm	WIDTH mm	DEPTH mm
TT6	6	1.8	80	1/240	370	160	200
TT10	10	2.4	110	1/240	380	195	235
TT10T*	10	2.4	110	1/240	380	235	235
TT20	20	2.4	110	1/240	480	195	235
TT20T*	20	2.4	110	1/240	480	235	235
TT30	30	2.4	110	1/240	535	195	235
TT30T	30	2.4	110	1/240	535	235	235
TT40	40	2.4	110	1/240	455	330	345
TT60	60	2.4	110	1/240	535	330	345

Specifications are subject to change without notice.
T* Unit fitted with programmable timer.


WARRANTY**
3 years on copper cylinder and tap body, one year on electrical element, temperature control card and ceramic disc.

W.A. DISTRIBUTORS: Kevin J. Mort Distributors
11 Belmont Avenue, Belmont, Western Australia 6104
Phone: (08) 9277 7177 Fax: (08) 9277 7700

Manufactured by: Aust. Dynamic Products P/L Trading as Whelan Industries A.B.N. 70 074 166 984
214-224 Wellington Road, Mulgrave, Victoria 3170. Telephone: (03) 9560 9000 Fax: (03) 9560 2233
Email: sales@whelanindustries.com.au www.whelanindustries.com.au

2/03

THIS IS WHY WHELAN'S THERMAL TAP IS THE BEST IN THE WORLD

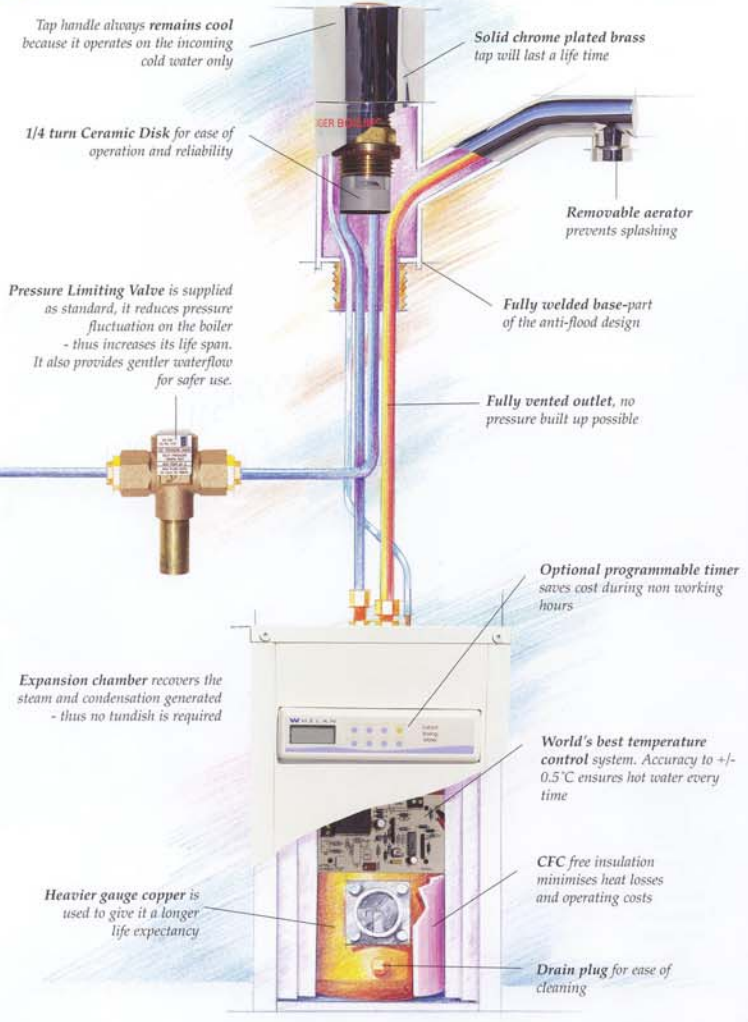


The Whelan Thermal Tap has established itself as the best choice for providing boiling water under the sink. It has the highest water temperature - 98°C, the biggest capacity 60 x 250ml cups and the best built-in safety features such as the anti flood designed tap and the provision of pressure limiting valve as part of its standard supply.

Options and Features:

- A tundish is not required
- Wide colour rang on handle
- Lever handle
- Extended tap body
- Child Safe handle
- Integral 24 hour, 7 day programmable timer
- Water purifier filter (compulsory in hard water areas)
- The best guarantee in the industry**

UNDER SINK ACCESSORIES

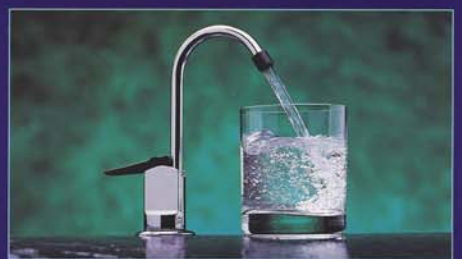

Touchflo Faucet
compact and reliable

Water Chiller
Ideal companion to the Thermal Tap. It offers cool, refreshing water on a hot summer's day.

- Large capacity, 6 litre per hour, stainless steel tank
- Environmental friendly R134A refrigerant used in compressor
- Forced draft ventilation for added efficiency
- Compressor can be linked to the programmable timer on the Thermal tap for further cost savings.



Twin Filter Manifold
1st stage pre-filter (3 micron) removes all dirt, rust, scale and other visible suspended matter.
2nd stage carbon filter (1 micron) removes taste, odour, chlorine and other chemicals such as herbicides and pesticides. The crystal clear filtered water can be connected to all of the following if desired- Thermal Tap, Water Chiller or just the Touchflo Faucet.

