

WHELAN

BOILING WATER UNIT

INSTANT BOILING WATER 24 HRS. DAY.



KITCHEN

CANTEEN



OFFICE



- Steam Free
- Clean
- Safe
- Hygienic
- Economical
- Automatic
- In Marvplate, White Enamel or optional Stainless
- Choice of other Colours in Baked Enamel Finishes


UNITS CAN BE
 • BENCH MOUNTED
 • WALL MOUNTED
 OR COMPLETELY
 CONCEALED



FIELD SITE

CANTEENS, CLUBS,
 RESTAURANTS, OFFICES,
 HOSPITALS, FACTORIES.


Whelan Boiling Water Units

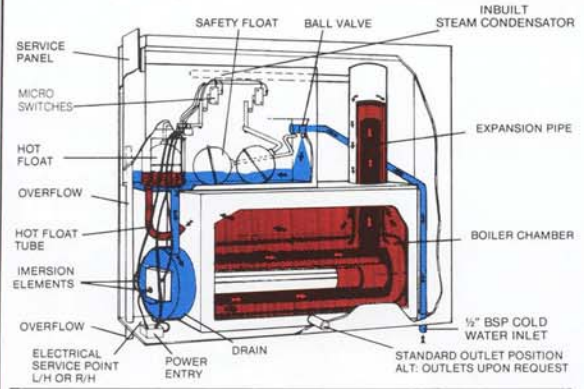

The Whelan Boiling Water Units are designed on the Expansion principal where water is boiled in one compartment and spilled over into another compartment where it is maintained at a constant boiling temperature. COLD WATER DOES NOT ENTER THE INSULATED STORAGE COMPARTMENT TO DILUTE THE BOILING WATER. When connected to the cold water and electrical reticulation the Unit will operate automatically to provide a continuous supply of boiling water 24 hours a day.

When the storage compartment is full of boiling water, float operated micro switch cuts the power to the element leaving a pilot element to maintain the boiling temperature.

Should the incoming cold water supply fail, another float operated micro switch completely cuts off the power preventing burning out of the elements.

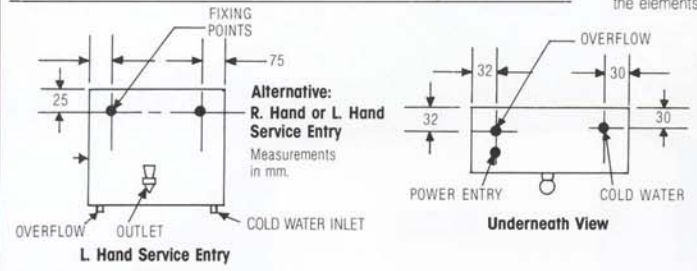

SPECIFICATIONS

DIMENSIONS

MODEL NO./LITRES	APPROX. NO. OF PEOPLE SERVE	KILOWATTS TOTAL	PHASES	CUPS/HR. RECOVERY	HEIGHT	WIDTH	DEPTH	OVERFLOW
SL 2.5	13	1.58	1/240	70	430	460	185	3/4" BSP
SL 5	25	1.58	1/240	70	500	460	185	3/4" BSP
SL 7.5	38	1.58	1/240	70	550	460	185	3/4" BSP
SL 10	50	2.25	1/240	100	500	600	250	3/4" BSP
SL 15	75	2.25	1/240	100	550	600	250	3/4" BSP
		4.8	2/415	200				
SL 20	100	2.25	1/240	100	600	600	250	3/4" BSP
		4.8	2/415	200				
SL 25	125	2.25	1/240	100	650	600	250	3/4" BSP
SL 30	150	2.25	1/240	100	700	600	250	3/4" BSP
		4.8	2/415	200				
		7.2	3/415	340				
SL 50	250	2.50	1/240	100	900	600	250	3/4" BSP
		4.8	2/415	200				
		7.2	3/415	340				
SL 60	300	2.50	1/240	100	1000	600	250	3/4" BSP
		4.8	2/415	200				
		7.2	3/415	340				
BENCH MODEL								
BW 90	450	3.5	1/240	160	915	600	500	3/4" BSP
		4.8	2/415	200				
		7.2	3/415	340				
BW 136	700	4.8	2/415	200	915	740	635	3/4" BSP
		7.2	3/415	340				
BW 180	900	4.8	2/415	230	915	800	700	3/4" BSP
		7.2	3/415	340				
BW 225	1200	7.2	3/415	340	915	900	800	3/4" BSP
BW 450	2400	9.0	3/415	410	1200	1020	915	1 1/2" BSP

Specifications subject to change without notice.

1 litre equals 5 cups approximately

W.A. DISTRIBUTORS: Kevin J. Mort Distributors
11 Belmont Avenue, Belmont, Western Australia 6104
Phone: (08) 9277 7177 Fax: (08) 9277 7700